



LUGGAGE RACK, GLOSS BLACK

7157

Thank You For Choosing Kuryakyn!

Protect yourself and others from potential injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

WARNING

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

NOTICE

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product to which it is being attached.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Luggage Rack with Rubber Insert
- 1 Hardware Kit Including:
 - 4 Cup washers
 - 2 Rubber Spacers with Adhesive Back
 - 8 Rubber washers
 - 2 #10-24 x 1"
 - 2 #10-24 x 1-1/4"
 - 4 Flat washer – 1/4" zinc

YOU WILL ALSO NEED:

Set of Hex Wrenches, Drill and Drill Bits, Masking Tape, and a Marker or Pen

NOTICE

These installation instructions contain important information. Ensure that the end user receives this copy and is aware of its importance for future use.

- STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn **IGN OFF**.

NOTICE

Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

- STEP 2 Without letting the Luggage Rack contact the Trunk Lid, hold it in the approximate mounting location. Place masking tape on the top (painted) surface of the trunk lid in the location of the luggage rack legs to prevent scratching.
- STEP 3 Set the luggage rack in position on top of the tour box, with the legs resting on the masking taped areas. While holding the rack centered where you want it, trace the location of the legs on to the masking tape. Carefully mark the very center of your tracings.
- STEP 4 Double check to be certain the rack is centered in the position you desire. Carefully drill a 1/4" hole at the center of the marked locations **AT THE REAR OF THE TOUR BOX ONLY!!** (Hint: You may want to drill a smaller diameter pilot hole first. This will lessen the chance of the drill "walking" and harming the finish. While drilling the rear holes, try to match the angle of the rear mounting legs.) Each hole will penetrate the inner and outer surface of the tour box at the rear mounting points.

WARNING



THE END USER'S SAFETY DEPENDS UPON PROPER INSTALLATION OF THIS PRODUCT. IF A STEP IN THESE INSTRUCTIONS IS NOT WITHIN YOUR CAPABILITIES OR YOU DO NOT HAVE THE CORRECT TOOLS, HAVE YOUR DEALER PERFORM THE PROCEDURE. IMPROPER INSTALLATION OF THIS PRODUCT COULD RESULT IN DEATH OR SERIOUS INJURY.

NOTICE

MEASURE TWICE—DRILL ONCE. Double check all reference marks **BEFORE** drilling. Kuryakyn is not responsible for incidental or consequential damages resulting from this installation.

STEP 5 Open the top of the tour box, and remove all fasteners that hold the inner surface of the box top in place. Remove the inner surface. Now drill the front two mounting holes as marked. Only the outer surface of the box will be drilled for the front two mounts. Remove the masking tape from around the front two holes. Mount the front half of the rack. The cupped washers will be inserted onto the feet of the luggage rack. The 10”–24 x 1” button head cap screws, one flat washer and two rubber washers will be used per bolt. A rubber washer will be placed on either side of the mounting surface and the metal washer next to the screw. Tighten these assemblies into the luggage racks front feet. Do not over tighten the fasteners. PIC 1 and FIG 1

STEP 6 Mounting the rear half of the rack. Remove the masking tape from around the rear holes. One at a time, remove the adhesive backing from the spacers. On the inside of the top of the tour box affix the rubber spacers so their I.D.s are concentric with the I.D. of the holes you drilled in the top of the box. Reinstall the inner surface of the tour box in the same manner as it was removed. Mount the rear half of the rack in the same manner as you did with the front half, except the 10”–24 x 1–1/4” button head cap screws will be used here. Tighten the rear mounting bolts. Do not over tighten the fasteners.

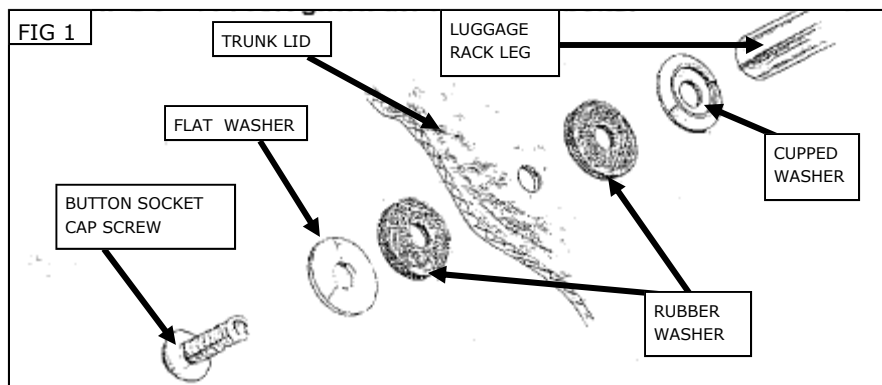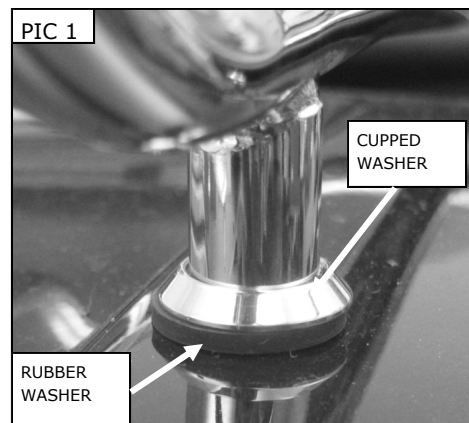

WARNING

NEVER EXCEED THE MANUFACTURER'S RECOMMENDED LOAD CAPACITY. EXCESS LOADING ON THE LUGGAGE RACK COULD CAUSE DAMAGE TO YOUR MOTORCYCLE, LOSS OR INJURY. KURYAKYN IS NOT RESPONSIBLE FOR ANY DAMAGE, LOSS, OR INJURY CAUSED BY EXCEEDING THE MANUFACTURER'S LOAD CAPACITY.

NOTICE

It is the end user's responsibility to ensure that all fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost or damaged due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. Merchandise purchased directly from Internet auction sites or any other third party seller is considered sold as is & shall not carry a Kuryakyn warranty. All warranty claims must be directed to the original seller. If unsure please contact the seller to verify they are an authorized Kuryakyn retailer.

RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.